



RY 2500B

Electrostatic Air Cleaner (Without Blower)



Industrial grade Electrostatic Air Cleaners for collection of dry and wet particulates like dust, oil mist, cooking fumes and various pollutants. Typical application include commercial kitchen exhausts, Air Handling Units (AHUs), factories, workshops, CNC machine shops and many other premises.




SPECIFICATIONS

Dimensions/Weight	H: 540 x W: 694 x L: 620 mm / 55Kg
Cabinet	Galvanized Steel, 1.4mm / 16 Gauge
Finishing	Powder Coated, Dark Blue
Air Volume (Rated-Max)#	CFM: 1500-2000max; CMH: 2500-3500max; L/s: 700-970max
Static Pressure	50 pa / 0.2"
Voltage & Power	230 VAC +/-10% , 50/60Hz, 50Watts
Ionising Voltages	High Voltage: 12KVdc, Low Voltage: 6KVdc
Air Flow Direction	Default : Right to Left; Reversible : Left to Right
Power Supply	High Frequency solid state and self regulating design
Features	<ul style="list-style-type: none"> *Short circuit, arc protection and auto restore power supply *BMS (Building Management System) terminals provided *Auto power cut-off when door is opened *Indicator LEDs for normal or wash indicator *Set of Terminals for remote LED normal or wash indicator
Particle size	From 0.01 microns - 10 microns
Efficiency	DOP Test, up to 95% single pass, up to 99% double pass, calculated. ASHRAE 52.2-2012, up to 96% single pass, up to 99% double pass, calculated. NIOSH 5026 OIL MIST FIELD TEST : UP TO 96%
MERV Ratings	Meets MERV 15 at velocity of 2.5m/s to 3.8m/s
Pre-Filter	Aluminum wire mesh, Washable x 1
Electrostatic Cell	H: 472mm, W: 550mm, L: 340mm
No of Cells / Weight	16.5Kg
No Of Plates per Cell	59
Total Collecting Area	6.07 Sq meters
Post Filter (Optional)	Aluminum Wire Mesh, Washable x 1
Installation	Ceiling Suspended; Wall or Frame Mounted, Multiple Units Stack




Front View



End View Air Inlet




End View

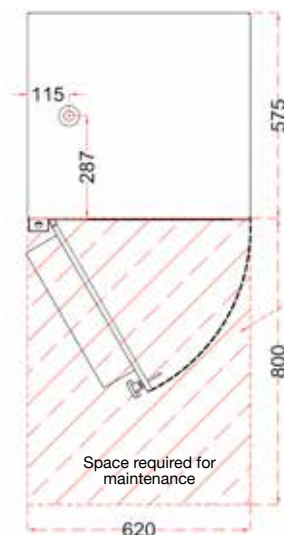

Top View

RY2500B with UV Ozone Lamp

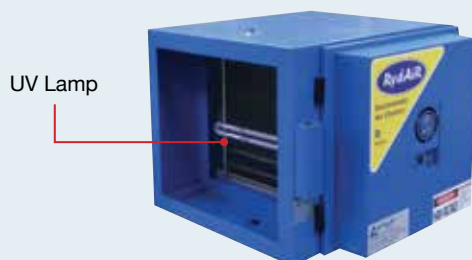

RY2500B-UV03

ODOUR CONTROL OPTION:

- UV ozone Lamp fitted after electrostatic cell
- Lamp Wattage : 65 Watts
- Ozone output : 6 Grams/Hour
- Lamp Life : 13,000 Hours
- Lamp Operation Blue LEDs on Unit's Panel
- All accessories are contained in RY Unit