



Module LLE 24x1120-1400mm HV ADV5

Modules LLE advanced

Product description

- Ideal for linear and panel lights
- 2 terminals for serial wiring
- Push terminals for quick and simple wiring of LED module to LED module
- Reduced mounting and wiring effort
- Broad portfolio from extruded lenses and covers available
- Long life-time: 72,000 hours
- 5-year guarantee

Optical properties

- Colour temperatures 3,000 K and 4,000 K
- Typ. luminous flux 650, 1,250 and 2,000 lm per foot
- Efficacy of the module up to 206 lm/W
- High colour rendering index CRI > 80
- High colour consistency (MacAdam 3)[®]
- Small luminous flux tolerances

Mechanical properties

- Module dimension 24 x 1,120 mm and 24 x 1,400 mm (ZHAGA compliant)
- Simple installation (e.g. clips or screws)

System solution

- LED system solution with outstanding system efficacy up to 186 lm/W, consisting of linear LED modules and dimmable LED Driver LCA 50W 100–400mA Ip PRE



Standards, page 11

Colour temperatures and tolerances, page 16



LLE 24x1120mm 2600lm HV ADV5



LLE 24x1400mm 3250lm HV ADV5




LLE 24x1120mm 4800lm HV ADV5



LLE 24x1400mm 6000lm HV ADV5



LLE 24x1120mm 8000lm HV ADV5

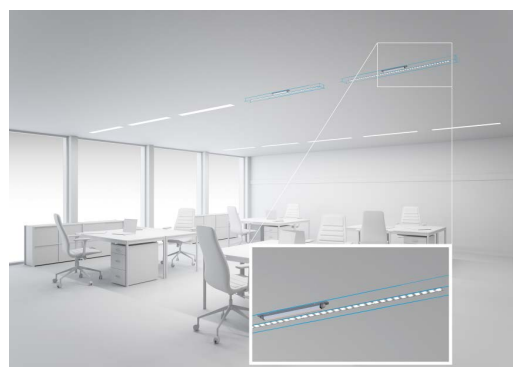




Module LLE 24x1120-1400mm HV ADV5


Modules LLE advanced

Technical data


Beam characteristic	120°
Ambient temperature range	-40 ... +65 °C
tp rated for 650, 1,250 lm/ft	50 °C
tp rated for 2,000 lm/ft	65 °C
tc	95 °C
Irated for 650, 1,250 lm/ft	300 mA
Irated for 2,000 lm/ft	325 mA
I _{max}	540 mA
Max. permissible LF current ripple	595 mA
Max. permissible peak current	900 mA / max. 10 ms
Max. working voltage for insulation for 650, 1,250 lm/ft [®]	440 V
Max. working voltage for insulation for 2,000 lm/ft [®]	320 V
Insulation test voltage for 650, 1,250 lm/ft	1.88 kV
Insulation test voltage for 2,000 lm/ft	1.64 kV
CTI of the printed circuit board	≥ 600
ESD classification	severity level 4
Risk group (IEC 62471) for 650lm/ft at I _{max}	RG0
Risk group (IEC 62471) for 1,250lm/ft at ≤ 470 mA	RG0
Risk group (IEC 62471) for 1,250lm/ft at I _{max}	RG1
Risk group (IEC 62471) for 2,000lm/ft at ≤ 310 mA	RG0
Risk group (IEC 62471) for 2,000lm/ft at I _{max}	RG1
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Life-time	up to 72,000 h
Guarantee	5 years

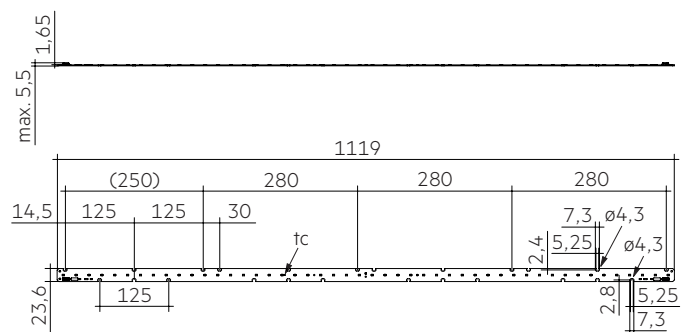


LLE 24x1120mm 2600lm HV ADV5

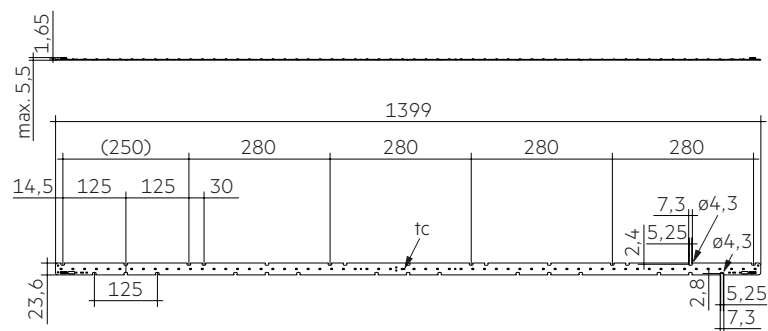

LLE 24x1400mm 3250lm HV ADV5

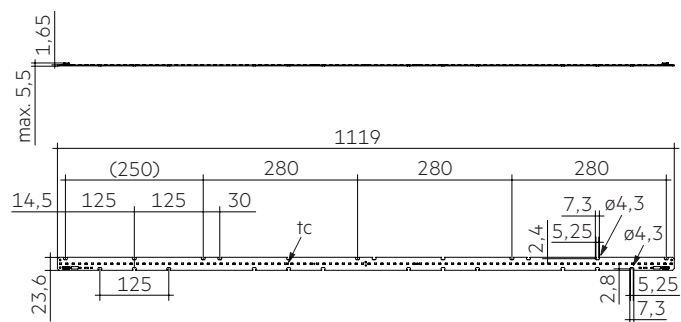


LLE 24x1120mm 4800lm HV ADV5

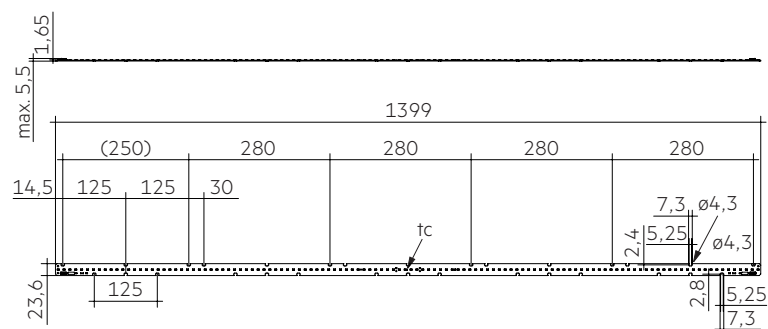

LLE 24x1400mm 6000lm HV ADV5

Module LLE 24x1120-1400mm HV ADV5

Modules LLE advanced

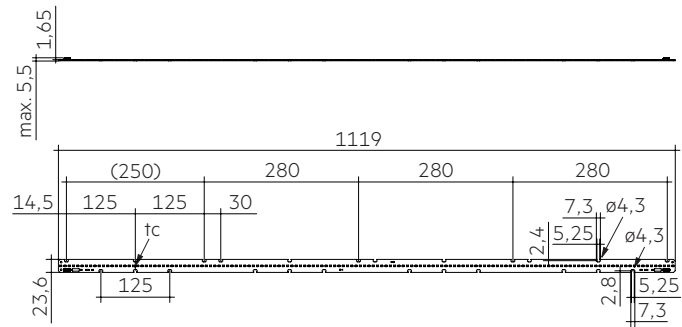

LLE 24x1120mm 8000lm HV ADV5

Ordering data

Type	Article number	Colour temperature	Packaging carton	Weight per pc.
650 lm per foot				
LLE 24x1120mm 2600lm 830 HV ADV5	89603197	3,000 K	20 pc(s).	0.090 kg
LLE 24x1120mm 2600lm 840 HV ADV5	89603198	4,000 K	20 pc(s).	0.090 kg
LLE 24x1400mm 3250lm 830 HV ADV5	89603199	3,000 K	20 pc(s).	0.115 kg
LLE 24x1400mm 3250lm 840 HV ADV5	89603200	4,000 K	20 pc(s).	0.115 kg
1,250 lm per foot				
LLE 24x1120mm 4800lm 830 HV ADV5	89603220	3,000 K	20 pc(s).	0.090 kg
LLE 24x1120mm 4800lm 840 HV ADV5	89603221	4,000 K	20 pc(s).	0.090 kg
LLE 24x1400mm 6000lm 830 HV ADV5	89603222	3,000 K	20 pc(s).	0.115 kg
LLE 24x1400mm 6000lm 840 HV ADV5	89603223	4,000 K	20 pc(s).	0.115 kg
2,000 lm per foot				
LLE 24x1120mm 8000lm 840 HV ADV5	89603246	4,000 K	20 pc(s).	0.090 kg


Specific technical data

Type [®]	Photo- metric code	Typ. luminous flux at tp = 25 °C [®] [®]	Typ. luminous flux at tp rated [®] [®]	Typ. forward current	Min. forward voltage at tp rated [®]	Max. forward voltage at tp = 25 °C [®]	Typ. power consumption at tp rated [®]	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp rated	Efficacy of the system at tp rated	Colour rendering index CRI
650 lm per foot – Operating mode HE at 200 mA											
LLE 24x1120mm 2600lm 830 HV ADV5	830/359	1,710 lm	1,660 lm	200 mA	41.4 V	44.8 V	8.7 W	196 lm/W	192 lm/W	177 lm/W	> 80
LLE 24x1120mm 2600lm 840 HV ADV5	840/359	1,800 lm	1,750 lm	200 mA	41.4 V	44.8 V	8.7 W	206 lm/W	202 lm/W	186 lm/W	> 80
LLE 24x1400mm 3250lm 830 HV ADV5	830/359	2,130 lm	2,080 lm	200 mA	51.7 V	56.1 V	10.8 W	196 lm/W	192 lm/W	177 lm/W	> 80
LLE 24x1400mm 3250lm 840 HV ADV5	840/359	2,240 lm	2,150 lm	200 mA	51.7 V	56.1 V	10.8 W	206 lm/W	202 lm/W	186 lm/W	> 80
650 lm per foot – Operating mode NM at 300 mA											
LLE 24x1120mm 2600lm 830 HV ADV5	830/359	2,460 lm	2,390 lm	300 mA	42.2 V	45.7 V	13.2 W	184 lm/W	181 lm/W	167 lm/W	> 80
LLE 24x1120mm 2600lm 840 HV ADV5	840/359	2,580 lm	2,510 lm	300 mA	42.2 V	45.7 V	13.2 W	194 lm/W	190 lm/W	175 lm/W	> 80
LLE 24x1400mm 3250lm 830 HV ADV5	830/359	3,070 lm	2,990 lm	300 mA	52.7 V	57.1 V	16.5 W	184 lm/W	181 lm/W	167 lm/W	> 80
LLE 24x1400mm 3250lm 840 HV ADV5	840/359	3,230 lm	3,140 lm	300 mA	52.7 V	57.1 V	16.5 W	194 lm/W	190 lm/W	175 lm/W	> 80
650 lm per foot – Operating mode HO at 500 mA											
LLE 24x1120mm 2600lm 830 HV ADV5	830/359	3,960 lm	3,860 lm	500 mA	43.6 V	47.1 V	22.8 W	173 lm/W	169 lm/W	155 lm/W	> 80
LLE 24x1120mm 2600lm 840 HV ADV5	840/359	4,170 lm	4,050 lm	500 mA	43.6 V	47.1 V	22.8 W	182 lm/W	178 lm/W	164 lm/W	> 80
LLE 24x1400mm 3250lm 830 HV ADV5	830/359	4,950 lm	4,820 lm	500 mA	54.5 V	58.9 V	28.4 W	173 lm/W	169 lm/W	155 lm/W	> 80
LLE 24x1400mm 3250lm 840 HV ADV5	840/359	5,210 lm	5,070 lm	500 mA	54.5 V	58.9 V	28.4 W	182 lm/W	178 lm/W	164 lm/W	> 80
1,250 lm per foot – Operating mode HE at 200 mA											
LLE 24x1120mm 4800lm 830 HV ADV5	830/359	3,410 lm	3,320 lm	200 mA	82.7 V	89.7 V	17.3 W	196 lm/W	192 lm/W	177 lm/W	> 80
LLE 24x1120mm 4800lm 840 HV ADV5	840/359	3,590 lm	3,490 lm	200 mA	82.7 V	89.7 V	17.3 W	206 lm/W	202 lm/W	186 lm/W	> 80
LLE 24x1400mm 6000lm 830 HV ADV5	830/359	4,270 lm	4,150 lm	200 mA	103.4 V	112.1 V	21.6 W	196 lm/W	192 lm/W	177 lm/W	> 80
LLE 24x1400mm 6000lm 840 HV ADV5	840/359	4,490 lm	4,370 lm	200 mA	103.4 V	112.1 V	21.6 W	206 lm/W	202 lm/W	186 lm/W	> 80
1,250 lm per foot – Operating mode NM at 300 mA											
LLE 24x1120mm 4800lm 830 HV ADV5	830/359	4,910 lm	4,780 lm	300 mA	84.4 V	91.3 V	26.5 W	184 lm/W	181 lm/W	167 lm/W	> 80
LLE 24x1120mm 4800lm 840 HV ADV5	840/359	5,170 lm	5,030 lm	300 mA	84.4 V	91.3 V	26.5 W	194 lm/W	190 lm/W	175 lm/W	> 80
LLE 24x1400mm 6000lm 830 HV ADV5	830/359	6,140 lm	5,980 lm	300 mA	105.4 V	114.2 V	32.9 W	184 lm/W	181 lm/W	167 lm/W	> 80
LLE 24x1400mm 6000lm 840 HV ADV5	840/359	6,460 lm	6,290 lm	300 mA	105.4 V	114.2 V	32.9 W	194 lm/W	190 lm/W	175 lm/W	> 80
1,250 lm per foot – Operating mode HO at 500 mA											
LLE 24x1120mm 4800lm 830 HV ADV5	830/359	7,920 lm	7,710 lm	500 mA	87.2 V	94.2 V	45.5 W	173 lm/W	169 lm/W	155 lm/W	> 80
LLE 24x1120mm 4800lm 840 HV ADV5	840/359	8,330 lm	8,110 lm	500 mA	87.2 V	94.2 V	45.5 W	182 lm/W	178 lm/W	164 lm/W	> 80
LLE 24x1400mm 6000lm 830 HV ADV5	830/359	9,900 lm	9,640 lm	500 mA	109.0 V	117.7 V	56.9 W	173 lm/W	169 lm/W	155 lm/W	> 80
LLE 24x1400mm 6000lm 840 HV ADV5	840/359	10,410 lm	10,140 lm	500 mA	109.0 V	117.7 V	56.9 W	182 lm/W	178 lm/W	164 lm/W	> 80
2,000 lm per foot – Operating mode HE at 200 mA											
LLE 24x1120mm 8000lm 840 HV ADV5	840/359	5,390 lm	5,150 lm	200 mA	123.5 V	134.5 V	25.8 W	206 lm/W	199 lm/W	183 lm/W	> 80
2,000 lm per foot – Operating mode NM at 325 mA											
LLE 24x1120mm 8000lm 840 HV ADV5	840/359	8,350 lm	7,990 lm	325 mA	126.5 V	137.6 V	43.0 V	192 lm/W	186 lm/W	171 lm/W	> 80
2,000 lm per foot – Operating mode HO at 500 mA											
LLE 24x1120mm 8000lm 840 HV ADV5	840/359	12,500 lm	11,950 lm	500 mA	130.2 V	141.3 V	67.9 W	182 lm/W	176 lm/W	162 lm/W	> 80

[®] Integral measurement over the complete module.[®] If mounted with M4 screws and plastic washers.[®] HE ... high efficiency, NM ... nominal mode, HO ... high output.[®] Tolerance range for optical and electrical data: ±10 %.[®] Measurement tolerance optical data: ±5 %.[®] Measurement tolerance forward voltage: ±0.1 V.

Product description

- LINEAR COVER for LLE 24
- Protection against direct touch for non-SELV applications
(recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- High transmission: transparent 94 %, semi-transparent 87 %, diffuse 76 %
- Made of PMMA
- Tolerances: ± 1 mm for 597 mm length (ends finished),
+ 20 mm for 1,200 / 1,500 / 1,600 / 1,800 mm length (ends raw)

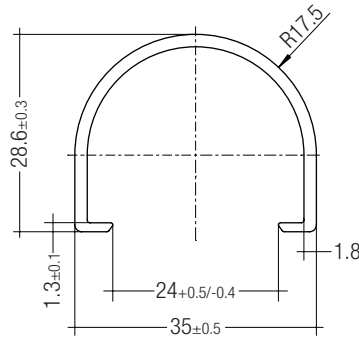

Ordering data

Type	Article number	Colour	Length	Packaging carton	Weight per pc.
LINEAR COVER SY Transparent 1600mm	28000338	Transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1800mm	28000437	Semi-transparent	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Frosted 1600mm	28000339	Semi-transparent	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Frosted 1500mm	28000435	Semi-transparent	1,500 mm	12 pc(s).	0.244 kg
LINEAR COVER SY Frosted 1200mm	28000422	Semi-transparent	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Frosted 597mm	28000340	Semi-transparent	597 mm	12 pc(s).	0.102 kg
LINEAR COVER SY Diffuse 1800mm	28000438	Diffuse	1,800 mm	12 pc(s).	0.308 kg
LINEAR COVER SY Diffuse 1600mm	28000341	Diffuse	1,600 mm	12 pc(s).	0.272 kg
LINEAR COVER SY Diffuse 1500mm	28000436	Diffuse	1,500 mm	12 pc(s).	0.257 kg
LINEAR COVER SY Diffuse 1200mm	28000434	Diffuse	1,200 mm	12 pc(s).	0.205 kg
LINEAR COVER SY Diffuse 597mm	28000342	Diffuse	597 mm	12 pc(s).	0.102 kg

Product description


- ENDCAP for LLE 24
- PUSH-FIX: Fast snap on mounting (sheet thickness 0.5 – 1.0 mm), for drilling hole 4 mm
- SCREW-FIX: Screw mounting with EJOT Delta PT WN 5451 30x8, tightening torque 0.7 Nm
- Made of Polycarbonat




ACL ENDCAP LLE24 PUSH-FIX



ACL ENDCAP LLE24 SCREW-FIX



ACL ENDCAP LLE24 PUSH-FIX

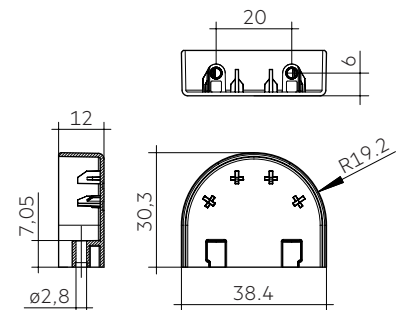

ACL ENDCAP LLE24 SCREW-FIX

Ordering data

Type	Article number	Colour	Packaging carton	Weight per pc.
ACL ENDCAP LLE24 PUSH-FIX	28001037	White	480 pc(s).	0.003 kg
ACL ENDCAP LLE24 SCREW-FIX	28002315	White	480 pc(s).	0.003 kg

Product description LINEAR LENS

- Linear lens for LLE 24
- Available with different beam characteristics
- Protection against direct touch for non-SELV applications (recommendation: use all fixing points)
- Fast snap on mounting on to LLE 24 with clips or plastic washers
- Linear lense made of PMMA
- Available lengths: 1,200, 1,500, 1,600 and 1,800 mm, Tolerance: + 10 mm, at 1,600 mm length $\pm$ 20 mm tolerance and raw ends
- Max. permissible temperature 80 °C
- Photometric data available on website

Product description Endcap

- ENDCAP for LINEAR LENS 24mm INTENSE, ASY and DASY
- Mounting by clipping in and screwing from below using screw EJOT Delta PT WN 5451 20x4, tightening torque 0.7 Nm
- Made of Polyamide UL94 V0



ACL LINEAR LENS 24mm 60°



ACL LINEAR LENS 24mm 90°



ACL LINEAR LENS 24mm INTENSE



ACL LINEAR LENS 24mm BATWING



ACL LINEAR LENS 24mm ASY




ACL LINEAR LENS 24mm DASY




ACL Endcap LENS 24mm PSF


ACL LENS 24mm

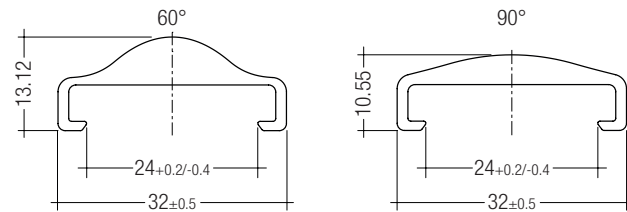


ACL LINEAR LENS 24mm 60° and 90°

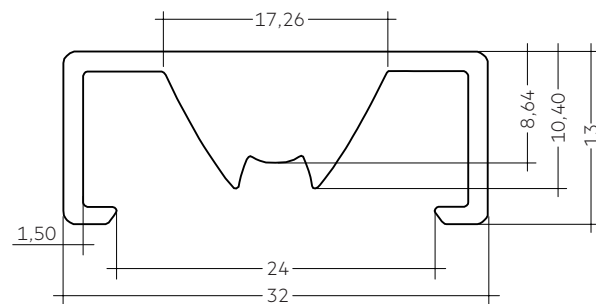


ACL LINEAR LENS 24mm INTENSE

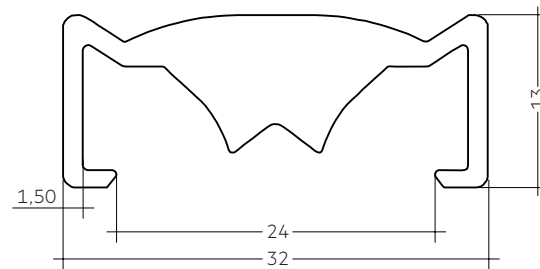

ACL LINEAR LENS 24mm BATWING

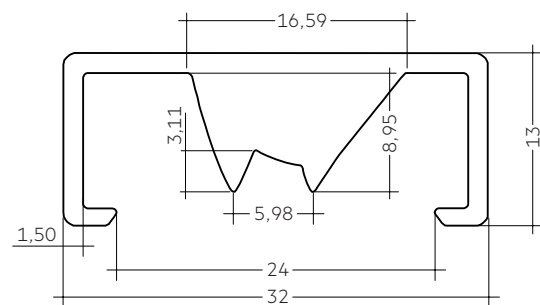


ACL LINEAR LENS 24mm ASY

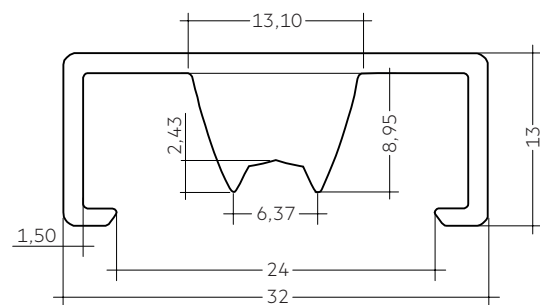

ACL LINEAR LENS 24mm DASY

ACL LENS 24mm

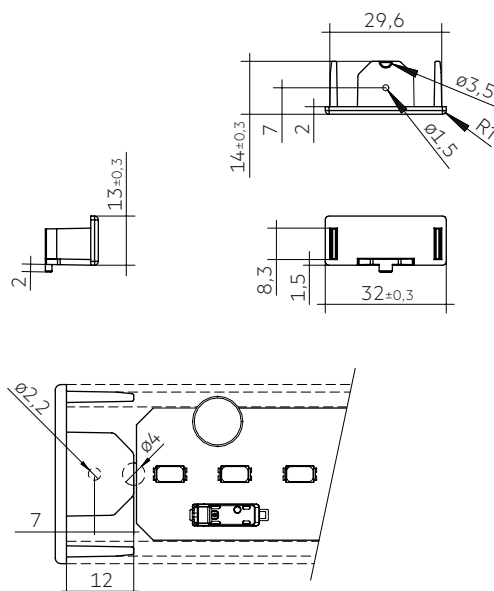

ACL Endcap LENS 24mm PSF

Ordering data

Type	Article number	Beam characteristic	Efficiency	Packaging carton	Weight per pc.
ACL LINEAR LENS 24x1200mm 60°	28001428	60°	97 %	21 pc(s).	0.196 kg
ACL LINEAR LENS 24x1200mm 90°	28001429	90°	97 %	21 pc(s).	0.165 kg
ACL LINEAR LENS 24x1600mm 60°	28000953	60°	97 %	21 pc(s).	0.261 kg
ACL LINEAR LENS 24x1600mm 90°	28000955	90°	97 %	21 pc(s).	0.221 kg
ACL LINEAR LENS 24x1200mm INTENSE	28002024	40°	95 %	18 pc(s).	0.261 kg
ACL LINEAR LENS 24x1500mm INTENSE	28002025	40°	95 %	18 pc(s).	0.326 kg
ACL LINEAR LENS 24x1800mm INTENSE	28002026	40°	95 %	18 pc(s).	0.392 kg
ACL LINEAR LENS 24x1200mm BATWING	28002027	batwing	95 %	18 pc(s).	0.275 kg
ACL LINEAR LENS 24x1500mm BATWING	28002028	batwing	95 %	18 pc(s).	0.344 kg
ACL LINEAR LENS 24x1800mm BATWING	28002029	batwing	95 %	18 pc(s).	0.412 kg
ACL LINEAR LENS 24x1200mm ASY	28002030	asymmetric	95 %	18 pc(s).	0.250 kg
ACL LINEAR LENS 24x1500mm ASY	28002031	asymmetric	95 %	18 pc(s).	0.312 kg
ACL LINEAR LENS 24x1800mm ASY	28002032	asymmetric	95 %	18 pc(s).	0.375 kg
ACL LINEAR LENS 24x1200mm DASY	28002033	double asymmetric	92 %	18 pc(s).	0.249 kg
ACL LINEAR LENS 24x1500mm DASY	28002034	double asymmetric	92 %	18 pc(s).	0.311 kg
ACL LINEAR LENS 24x1800mm DASY	28002035	double asymmetric	92 %	18 pc(s).	0.373 kg
ACL Endcap LENS 24mm PSF	28002669	–	–	720 pc(s).	0.003 kg

**ACCES-
SORIES**


CLIP 4.3mm

Product description

- Clip for fixation of LED modules with 4.3 mm holes
- Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- For drilling hole 4 mm
- Clip made of Polycarbonat




ACL CLIP 4.3mm PUSH-FIX

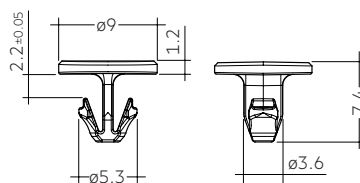

ACL CLIP 4.3mm PUSH-FIX



ACL CLIP 4.3mm PUSH-FIX Long

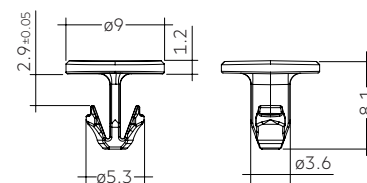

ACL CLIP 4.3mm PUSH-FIX Long

Ordering data

Type	Article number	Colour	Packaging bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg


^① Minimum sales quantity 500 pcs.

**ACCES-
SORIES**

BRIDGE LLE24/40

Product description

- Enables the fixation of 24 mm wide Tridonic LED modules to fixtures made for 40 mm wide modules
- Ideal for extruded aluminium gear trays made for 40 mm modules with pre-alignment knobs
- Clip-on for LINEAR COVER and LINEAR LENS[®]
- For LLE 24 with 280 mm module minimum 2 bridges required
- For LLE 24 with 560 mm module minimum 3 bridges required
- Fixation via M3 or M4 countersunk screw, max. tightening torque 0.5 Nm
- BRIDGE made of white polycarbonate

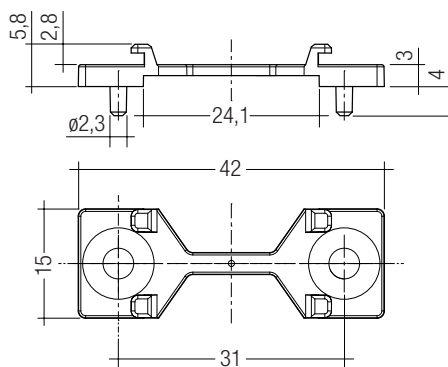

Ordering data

Type	Article number	Colour	Packaging carton ^①	Weight per pc.
ACL BRIDGE LLE24/40 SCREW-FIX	28001205	White	600 Stk.	0.001 kg

^① Minimum sales quantity 600 pcs.

[®] Beam characteristics will change due to the elevated fixation (see photometric files for details).

1. Standards

IEC 62031
IEC 62471
IEC 61000-4-2
IEC 62778
IEC 61547
UL 8750

1.1 Photometric code

Key for photometric code, e. g. 830 / 349

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code	CRI	Colour temperature in Kelvin x 100	MacAdam after 25% of the life-time (max.6000h)	Luminous flux after 25% of the life-time (max.6000h)
7	70 – 79	MacAdam initial	(max.6000h)	Code
8	80 – 89			Luminous flux
9	≥90			

1.2 Energy classification

Type	Energy classification
LLE 24mm HV ADV5	A++

2. Thermal details

2.1 tc point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a LED product.

For LLE a tp temperature of 50 °C / 65 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and life-time.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40...+80 °C
---------------------	--------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Heat sink values

LLE 24x1120mm 2600lm ADV5

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	self cooling	
25 °C	50 °C	500 mA	2.15 K/W	310 cm²
35 °C	50 °C	300 mA	2.38 K/W	281 cm²
35 °C	50 °C	500 mA	1.29 K/W	516 cm²
40 °C	50 °C	300 mA	1.58 K/W	421 cm²
40 °C	50 °C	500 mA	0.86 K/W	775 cm²
45 °C	50 °C	300 mA	0.79 K/W	843 cm²
45 °C	50 °C	500 mA	0.43 K/W	1,553 cm²

LLE 24x1400mm 3250lm ADV5

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	self cooling	
25 °C	50 °C	500 mA	1.72 K/W	387 cm²
35 °C	50 °C	300 mA	1.90 K/W	351 cm²
35 °C	50 °C	500 mA	1.03 K/W	645 cm²
40 °C	50 °C	300 mA	1.27 K/W	526 cm²
40 °C	50 °C	500 mA	0.69 K/W	969 cm²
45 °C	50 °C	300 mA	0.63 K/W	1,054 cm²
45 °C	50 °C	500 mA	0.34 K/W	1,941 cm²

LLE 24x1120mm 4800lm ADV5

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	1.81 K/W	368 cm²
25 °C	50 °C	500 mA	1.08 K/W	620 cm²
35 °C	50 °C	300 mA	1.09 K/W	613 cm²
35 °C	50 °C	500 mA	0.64 K/W	1,034 cm²
40 °C	50 °C	300 mA	0.72 K/W	921 cm²
40 °C	50 °C	500 mA	0.43 K/W	1,553 cm²
45 °C	50 °C	300 mA	0.36 K/W	1,846 cm²
45 °C	50 °C	500 mA	0.21 K/W	3,118 cm²

LLE 24x1400mm 6000lm ADV5

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	50 °C	300 mA	1.45 K/W	460 cm²
25 °C	50 °C	500 mA	0.86 K/W	775 cm²
35 °C	50 °C	300 mA	0.87 K/W	767 cm²
35 °C	50 °C	500 mA	0.52 K/W	1,292 cm²
40 °C	50 °C	300 mA	0.58 K/W	1,151 cm²
40 °C	50 °C	500 mA	0.34 K/W	1,941 cm²
45 °C	50 °C	300 mA	0.29 K/W	2,308 cm²
45 °C	50 °C	500 mA	0.17 K/W	3,897 cm²

LLE 24x1120mm 8000lm ADV5

ta	tp	Forward current	R _{th, hs-a}	Cooling area
25 °C	65 °C	325 mA	1.97 K/W	339 cm²
25 °C	65 °C	500 mA	1.15 K/W	582 cm²
35 °C	65 °C	325 mA	1.47 K/W	452 cm²
35 °C	65 °C	500 mA	0.86 K/W	776 cm²
40 °C	65 °C	325 mA	1.23 K/W	543 cm²
40 °C	65 °C	500 mA	0.72 K/W	932 cm²
45 °C	65 °C	325 mA	0.98 K/W	679 cm²
45 °C	65 °C	500 mA	0.57 K/W	1,166 cm²
50 °C	65 °C	325 mA	0.74 K/W	905 cm²
50 °C	65 °C	500 mA	0.43 K/W	1,556 cm²
55 °C	65 °C	325 mA	0.49 K/W	1,360 cm²
55 °C	65 °C	500 mA	0.29 K/W	2,338 cm²
60 °C	65 °C	325 mA	0.24 K/W	2,728 cm²
60 °C	65 °C	500 mA	0.14 K/W	4,704 cm²

Notes

The actual cooling surface can differ because of the material, the structural shape, outside influences and the installation situation. Depending on the heat sink a heat conducting paste or heat conducting film might be necessary to keep the specified tp temperature.

3. Installation / wiring

3.1 Electrical supply/choice of LED Driver

LLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED Driver which complies with the relevant standards. The use of LED Driver from Tridonic in combination with LLE modules guarantees the necessary protection for safe and reliable operation.

If a LED Driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



LLE modules must be supplied by a constant current LED Driver. Operation with a constant voltage LED Driver will lead to an irreversible damage of the module.

Wrong polarity can damage the LLE.

The LLE module is designed for serial wiring.

LLE can be operated either from SELV LED Drivers or from LED Drivers with LV output voltage.




LLE are basic insulated up to 440 V / 320 V (if mounted with M4 screws with head diameter 7 mm in combination with plastic washers) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the LED Driver (also against earth) is above 440 V / 320 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction. At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring



Wiring example

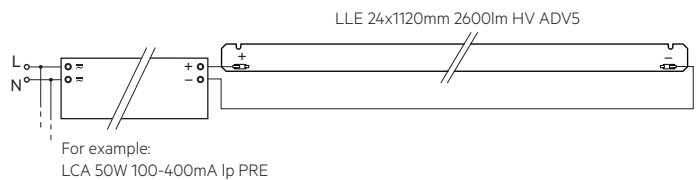


3.3 Wiring type and cross section

The wiring can be in stranded wires or solid with a cross section of 0.2 to 0.75 mm².

For the push-wire connection you have to strip the insulation (8–9 mm).

wire preparation:
0.2 – 0.75 mm²



To remove the wires use a suitable tool (e.g. Microcon release pin) or through twist and pull.

3.4 Mounting instruction



None of the components of the LLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted onto a heat sink with min. 12 screws per module or ACL CLIP 4.3mm.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Life-time

4.1 Life-time, lumen maintenance and failure rate

The light output of an LED Module decreases over the life-time, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux.
This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.
In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for LLE 24mm HV ADV5

Forward current	tp tempera- ture	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
150 mA	40 °C	43,000 h	59,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	42,000 h	57,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	41,000 h	55,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	40,000 h	54,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	39,000 h	52,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	38,000 h	50,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	38,000 h	49,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	37,000 h	47,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	36,000 h	46,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	35,000 h	45,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
200 mA	40 °C	43,000 h	58,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	42,000 h	57,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	41,000 h	55,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	40,000 h	53,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	39,000 h	51,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	38,000 h	50,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	37,000 h	48,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	36,000 h	47,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	36,000 h	45,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	35,000 h	44,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
300 mA	40 °C	42,000 h	58,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	41,000 h	56,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	40,000 h	54,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	40,000 h	52,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	39,000 h	51,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	38,000 h	49,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	37,000 h	48,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	36,000 h	46,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	35,000 h	45,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	34,000 h	44,000 h	70,000 h	>72,000 h	>72,000 h	>72,000 h

Forward current	tp tempera- ture	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
375 mA	40 °C	42,000 h	57,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	41,000 h	55,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	40,000 h	54,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	39,000 h	52,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	38,000 h	50,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	37,000 h	49,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	37,000 h	47,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	36,000 h	46,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	35,000 h	44,000 h	71,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	34,000 h	43,000 h	69,000 h	>72,000 h	>72,000 h	>72,000 h
450 mA	40 °C	42,000 h	56,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	41,000 h	55,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	40,000 h	53,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	39,000 h	51,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	38,000 h	50,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	37,000 h	48,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	36,000 h	47,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	35,000 h	45,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	35,000 h	44,000 h	70,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	34,000 h	43,000 h	69,000 h	>72,000 h	>72,000 h	>72,000 h
500 mA	40 °C	41,000 h	56,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	45 °C	40,000 h	54,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	50 °C	39,000 h	52,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	55 °C	38,000 h	51,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	60 °C	38,000 h	49,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	65 °C	37,000 h	48,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	70 °C	36,000 h	46,000 h	>72,000 h	>72,000 h	>72,000 h	>72,000 h
	75 °C	35,000 h	45,000 h	71,000 h	>72,000 h	>72,000 h	>72,000 h
	80 °C	34,000 h	43,000 h	70,000 h	>72,000 h	>72,000 h	>72,000 h
	85 °C	34,000 h	42,000 h	68,000 h	>72,000 h	>72,000 h	>72,000 h

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

I_{rated} ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. The tolerances of the LED driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current


LLE 24x1120mm 2600lm 8xx HV ADV5

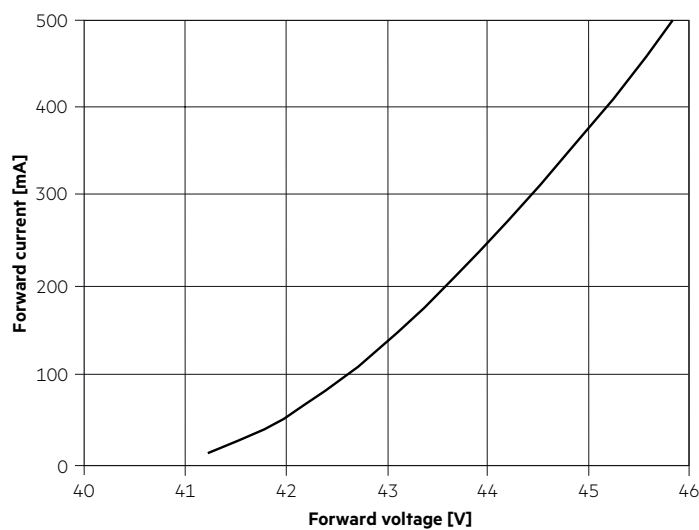


LLE 24x1400mm 3250lm 8xx HV ADV5

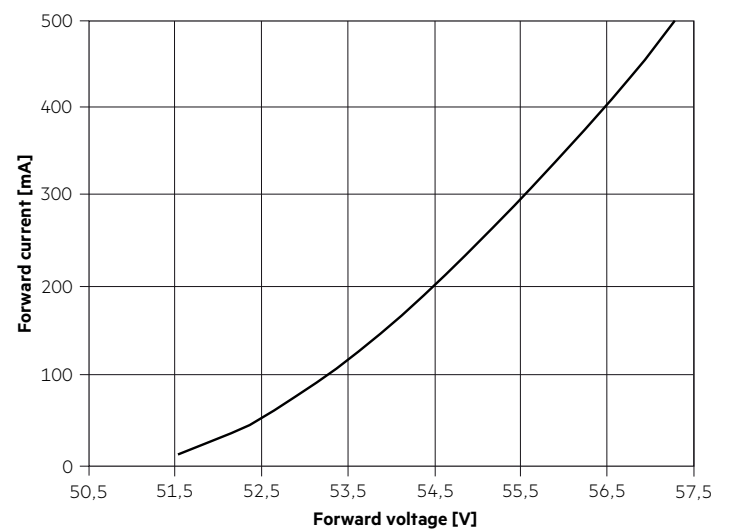

LLE 24x1120mm 4800lm 8xx HV ADV5

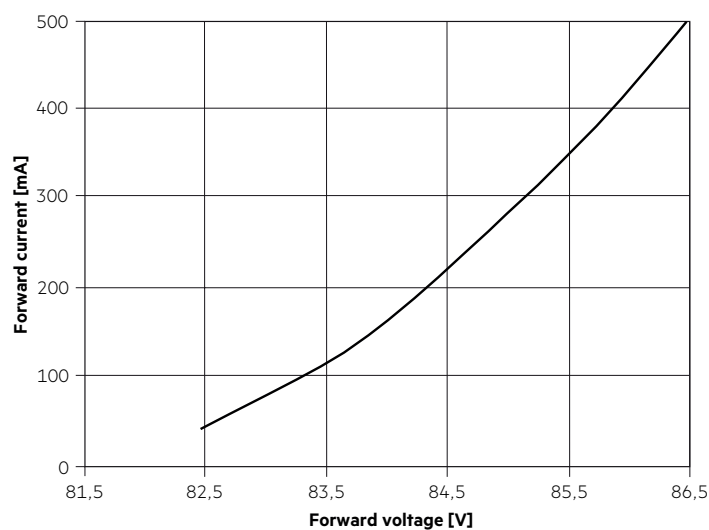


LLE 24x1400mm 6000lm 8xx HV ADV5

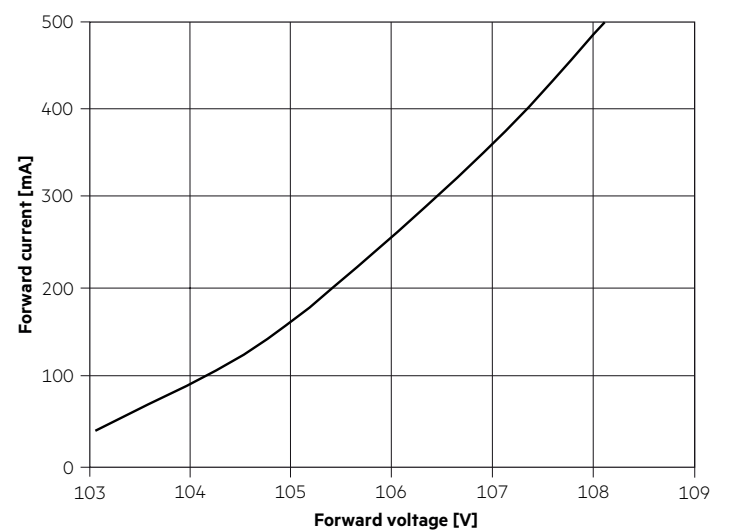


The diagrams are based on statistic values.
The real values can be different.

LLE 24x1120mm 8000lm 8xx HV ADV5

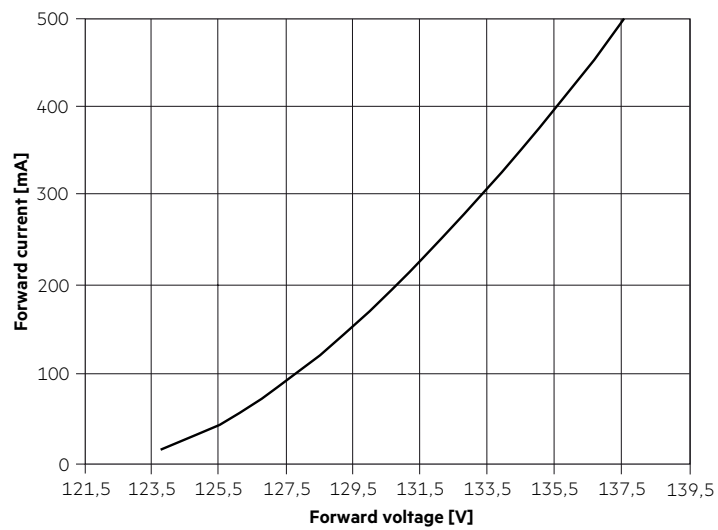

5.3 Forward voltage vs. tc temperature

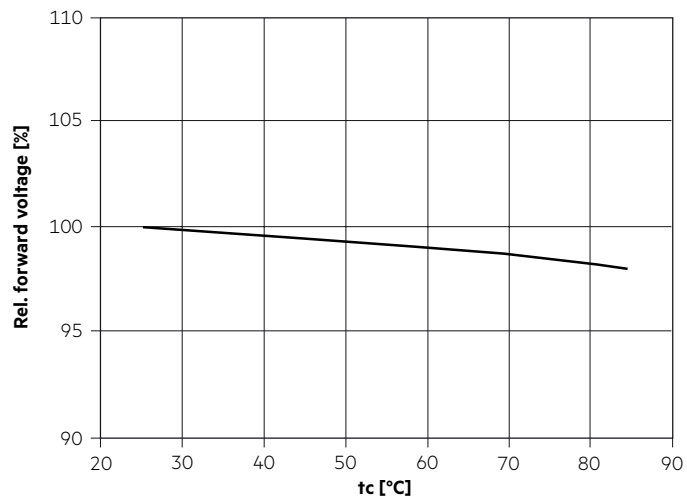

The diagrams are based on statistic values.
The real values can be different.



6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are integral measured by current impulse of 195 mA and a duration of 100 ms.
The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.
The measurement tolerance of the colour coordinates are ± 0.01 .



3,000 K

	x0	y0
Centre	0.4338	0.4030

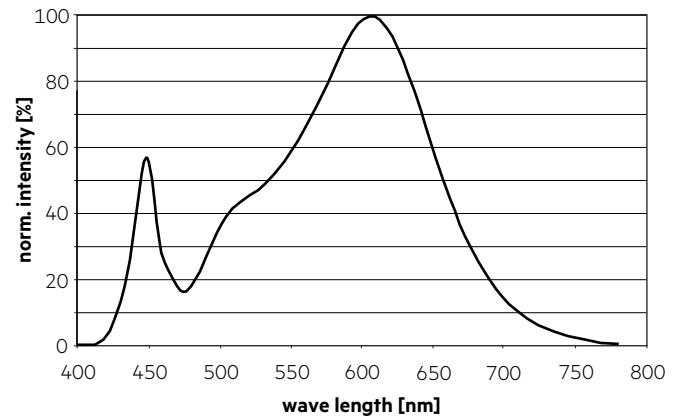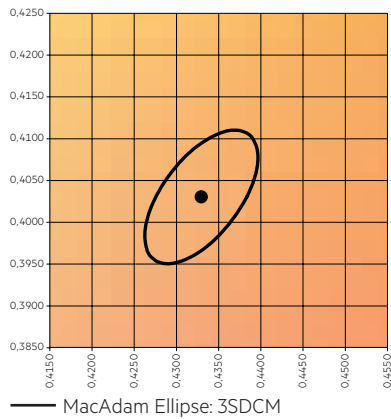


4,000 K

	x0	y0
Center	0.3818	0.3797

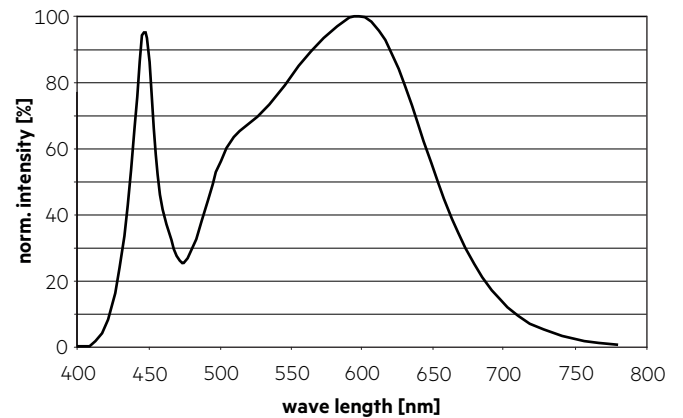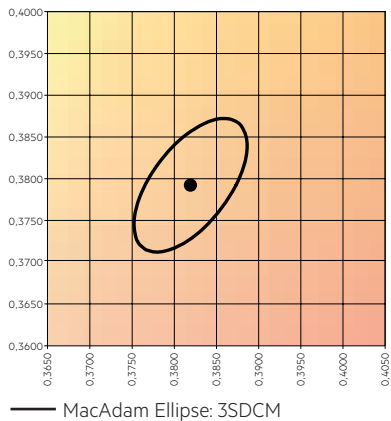

6.2 Light distribution


The optical design of the LLE product line ensures optimum homogeneity for the light distribution.

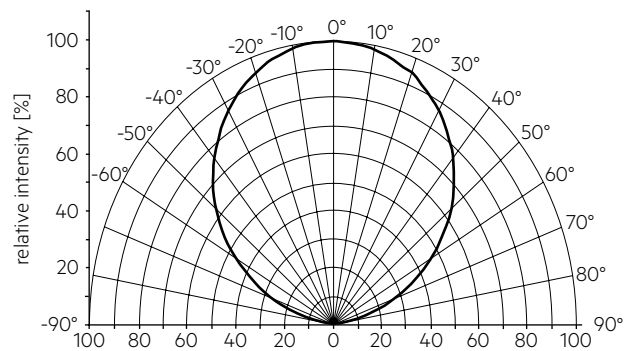

The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam 5.


To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 4 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

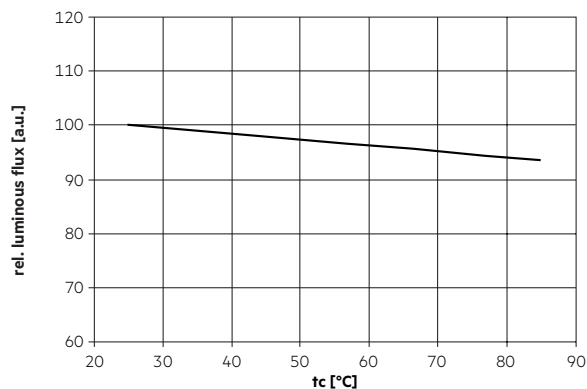


6.4 Relative luminous flux vs. operating current

650, 1,250 lm/ft

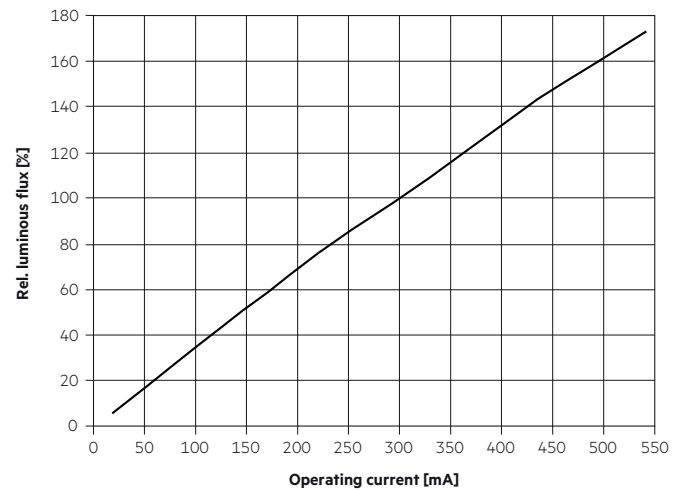

2,000 lm/ft

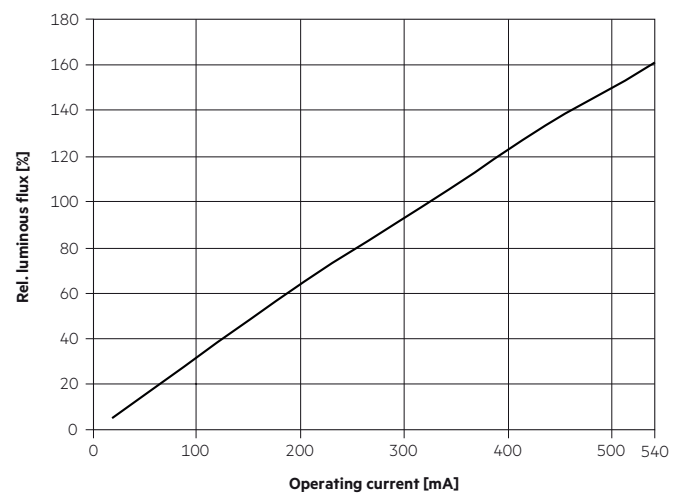

The diagrams are based on statistic values.
The real values can be different.

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Life-time declarations are informative and represent no warranty claim.