



Module QLE ADV5

Modules QLE advanced

Product description

- Ideal for linear and panel lights
- Perfectly uniform light, even if several LED modules are used together in a line
- Self cooling (no additional heat sink required)
- Push terminals for quick and simple wiring of LED module to LED module
- Long life-time: 72,000 hours
- 5-year guarantee

Optical properties

- Colour temperatures 3,000, 4,000 and 5,000 K
- Luminous flux range from 1,000 – 5,500 lm
- Efficacy of the module up to 203 lm/W
- High colour rendering index CRI > 80
- Small colour tolerance MacAdam 3rd
- Small luminous flux tolerances

Mechanical properties

- Module dimension 250 x 250 mm, 270 x 270 mm and 540 x 270 mm
- Simple installation (e.g. screws)

System solution

- LED system solution with outstanding system efficacy up to 181 lm/W, consisting of squared LED modules and dimmable LED Driver LCA 50W 150–400mA Ip PRE



Standards, page 6

Colour temperatures and tolerances, page 11



QLE 250x250mm 1250lm ADV5



QLE 270x270mm 1250lm ADV5



QLE 540x270mm 2500lm ADV5






Module QLE ADV5


Modules QLE advanced

Technical data


Beam characteristic	120°
Ambient temperature range	-40 ... +65 °C
tp rated	45 °C
tc	90 °C
Irated for 250x250 / 270x270mm	200 mA
Irated for 540x270mm	400 mA
I _{max} for 250x250 / 270x270mm	1,200 mA
I _{max} for 540x270mm	2,400 mA
Max. permissible LF current ripple for 250x250 / 270x270mm	1,320 mA
Max. permissible LF current ripple for 540x270mm	2,640 mA
Max. permissible peak current for 250x250 / 270x270mm	2,400 mA / max. 10 ms
Max. permissible peak current for 540x270mm	4,800 mA / max. 10 ms
Max. working voltage for insulation [®]	405 V
Insulation test voltage	1.81 kV
CTI of the printed circuit board	≥ 600
ESD classification	severity level 4
Risk group (IEC 62471:2008) [®]	RG1
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Life-time	up to 72,000 h

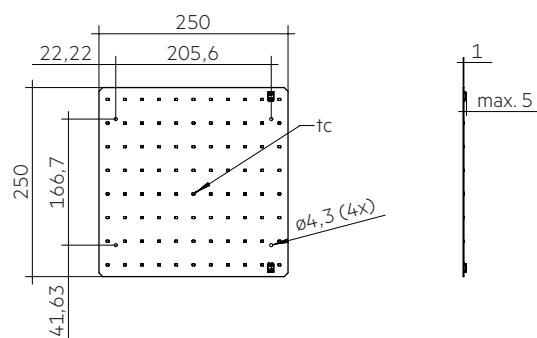

QLE 250x250mm 1250lm ADV5

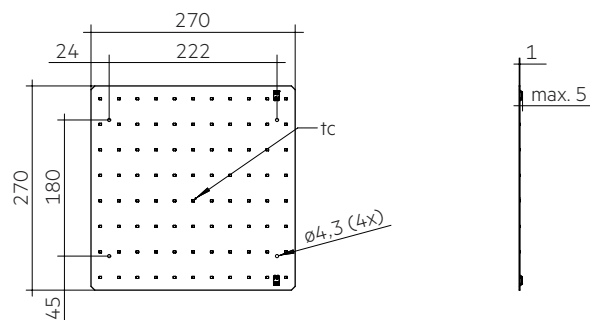

QLE 270x270mm 1250lm ADV5

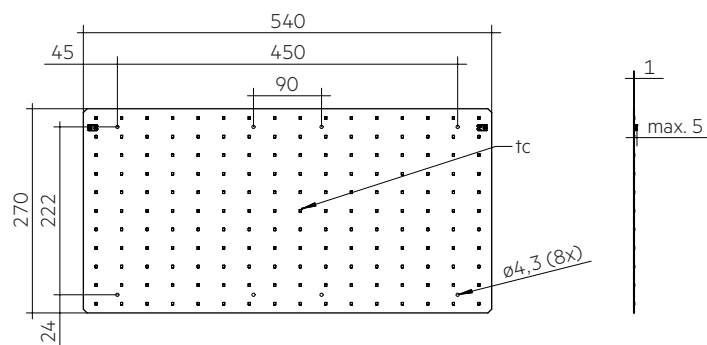

QLE 540x270mm 2500lm ADV5

Ordering data

Type	Article number	Colour temperature	Packaging carton	Weight per pc.
QLE 250x250mm 1250lm 830 ADV5	28002979	3,000 K	40 pc(s).	0.140 kg
QLE 250x250mm 1250lm 840 ADV5	28002981	4,000 K	40 pc(s).	0.140 kg
QLE 250x250mm 1250lm 850 ADV5	28002982	5,000 K	40 pc(s).	0.140 kg
QLE 270x270mm 1250lm 830 ADV5	28002985	3,000 K	40 pc(s).	0.165 kg
QLE 270x270mm 1250lm 840 ADV5	28002987	4,000 K	40 pc(s).	0.165 kg
QLE 270x270mm 1250lm 850 ADV5	28002988	5,000 K	40 pc(s).	0.165 kg
QLE 540x270mm 2500lm 830 ADV5	28002991	3,000 K	20 pc(s).	0.325 kg
QLE 540x270mm 2500lm 840 ADV5	28002993	4,000 K	20 pc(s).	0.325 kg

Specific technical data

Type [®]	Photo-metric code	Typ. luminous flux at tp = 25 °C [®]	Typ. luminous flux at tp = 45 °C [®]	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Typ. power consumption at tp = 45 °C [®]	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 45 °C	Efficacy of the system at tp = 45 °C	Colour rendering index CRI
QLE 250x250 / 270x270 mm – Operating mode NM at 200 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	1,120 lm	1,070 lm	200 mA	27.0 V	31.0 V	5.7 W	194 lm/W	188 lm/W	173 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	1,160 lm	1,110 lm	200 mA	27.0 V	31.0 V	5.7 W	201 lm/W	195 lm/W	179 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	1,170 lm	1,120 lm	200 mA	27.0 V	31.0 V	5.7 W	203 lm/W	197 lm/W	181 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	1,120 lm	1,070 lm	200 mA	27.0 V	31.0 V	5.7 W	194 lm/W	188 lm/W	173 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	1,160 lm	1,110 lm	200 mA	27.0 V	31.0 V	5.7 W	201 lm/W	195 lm/W	179 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	1,170 lm	1,120 lm	200 mA	27.0 V	31.0 V	5.7 W	203 lm/W	197 lm/W	181 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode NM at 250 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	1,400 lm	1,340 lm	250 mA	27.2 V	31.2 V	7.2 W	193 lm/W	187 lm/W	172 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	1,450 lm	1,390 lm	250 mA	27.2 V	31.2 V	7.2 W	200 lm/W	194 lm/W	178 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	1,460 lm	1,400 lm	250 mA	27.2 V	31.2 V	7.2 W	201 lm/W	196 lm/W	180 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	1,400 lm	1,340 lm	250 mA	27.2 V	31.2 V	7.2 W	193 lm/W	187 lm/W	172 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	1,450 lm	1,390 lm	250 mA	27.2 V	31.2 V	7.2 W	200 lm/W	194 lm/W	178 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	1,460 lm	1,400 lm	250 mA	27.2 V	31.2 V	7.2 W	201 lm/W	196 lm/W	180 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode HO at 300 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	1,680 lm	1,610 lm	300 mA	27.4 V	31.4 V	8.7 W	192 lm/W	186 lm/W	171 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	1,740 lm	1,670 lm	300 mA	27.4 V	31.4 V	8.7 W	198 lm/W	193 lm/W	178 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	1,760 lm	1,680 lm	300 mA	27.4 V	31.4 V	8.7 W	201 lm/W	194 lm/W	178 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	1,680 lm	1,610 lm	300 mA	27.4 V	31.4 V	8.7 W	192 lm/W	186 lm/W	171 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	1,740 lm	1,670 lm	300 mA	27.4 V	31.4 V	8.7 W	198 lm/W	193 lm/W	178 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	1,760 lm	1,680 lm	300 mA	27.4 V	31.4 V	8.7 W	201 lm/W	194 lm/W	178 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode HO at 350 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	1,960 lm	1,880 lm	350 mA	27.6 V	31.6 V	10.2 W	190 lm/W	185 lm/W	170 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	2,030 lm	1,950 lm	350 mA	27.6 V	31.6 V	10.2 W	197 lm/W	192 lm/W	177 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	2,050 lm	1,960 lm	350 mA	27.6 V	31.6 V	10.2 W	199 lm/W	193 lm/W	178 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	1,960 lm	1,880 lm	350 mA	27.6 V	31.6 V	10.2 W	190 lm/W	185 lm/W	170 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	2,030 lm	1,950 lm	350 mA	27.6 V	31.6 V	10.2 W	197 lm/W	192 lm/W	177 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	2,050 lm	1,960 lm	350 mA	27.6 V	31.6 V	10.2 W	199 lm/W	193 lm/W	178 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode HO at 400 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	2,250 lm	2,150 lm	400 mA	27.7 V	31.8 V	11.7 W	190 lm/W	185 lm/W	170 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	2,330 lm	2,230 lm	400 mA	27.7 V	31.8 V	11.7 W	197 lm/W	191 lm/W	176 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	2,350 lm	2,250 lm	400 mA	27.7 V	31.8 V	11.7 W	198 lm/W	193 lm/W	178 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	2,250 lm	2,150 lm	400 mA	27.7 V	31.8 V	11.7 W	190 lm/W	185 lm/W	170 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	2,330 lm	2,230 lm	400 mA	27.7 V	31.8 V	11.7 W	197 lm/W	191 lm/W	176 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	2,350 lm	2,250 lm	400 mA	27.7 V	31.8 V	11.7 W	198 lm/W	193 lm/W	178 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode HO at 450 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	2,530 lm	2,420 lm	450 mA	27.9 V	32.0 V	13.2 W	189 lm/W	183 lm/W	168 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	2,620 lm	2,510 lm	450 mA	27.9 V	32.0 V	13.2 W	195 lm/W	190 lm/W	175 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	2,640 lm	2,530 lm	450 mA	27.9 V	32.0 V	13.2 W	197 lm/W	191 lm/W	176 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	2,530 lm	2,420 lm	450 mA	27.9 V	32.0 V	13.2 W	189 lm/W	183 lm/W	168 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	2,620 lm	2,510 lm	450 mA	27.9 V	32.0 V	13.2 W	195 lm/W	190 lm/W	175 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	2,640 lm	2,530 lm	450 mA	27.9 V	32.0 V	13.2 W	197 lm/W	191 lm/W	176 lm/W	> 80
QLE 250x250 / 270x270 mm – Operating mode HO at 500 mA											
QLE 250x250mm 1250lm 830 ADV5	830/359	2,810 lm	2,690 lm	500 mA	28.1 V	32.2 V	14.8 W	188 lm/W	182 lm/W	167 lm/W	> 80
QLE 250x250mm 1250lm 840 ADV5	840/359	2,910 lm	2,790 lm	500 mA	28.1 V	32.2 V	14.8 W	194 lm/W	189 lm/W	174 lm/W	> 80
QLE 250x250mm 1250lm 850 ADV5	850/359	2,940 lm	2,810 lm	500 mA	28.1 V	32.2 V	14.8 W	196 lm/W	190 lm/W	175 lm/W	> 80
QLE 270x270mm 1250lm 830 ADV5	830/359	2,810 lm	2,690 lm	500 mA	28.1 V	32.2 V	14.8 W	188 lm/W	182 lm/W	167 lm/W	> 80
QLE 270x270mm 1250lm 840 ADV5	840/359	2,910 lm	2,790 lm	500 mA	28.1 V	32.2 V	14.8 W	194 lm/W	189 lm/W	174 lm/W	> 80
QLE 270x270mm 1250lm 850 ADV5	850/359	2,940 lm	2,810 lm	500 mA	28.1 V	32.2 V	14.8 W	196 lm/W	190 lm/W	175 lm/W	> 80

[®] Integral measurement over the complete module.[®] If mounted with M4 screws.[®] Tolerance range for optical data: ±7.5 % and electrical data: ±10 %.[®] NM ... nominal mode, HO ... high output.[®] Measured at Imax.

Specific technical data

Type ^①	Photo-metric code	Typ. luminous flux at tp = 25 °C ^②	Typ. luminous flux at tp = 45 °C ^③	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Typ. power consumption at tp = 45 °C ^④	Efficacy of the module at tp = 25 °C	Efficacy of the module at tp = 45 °C	Efficacy of the system at tp = 45 °C	Colour rendering index CRI
QLE 540x270mm – Operating mode NM at 400 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	2,240 lm	2,140 lm	400 mA	27.0 V	31.0 V	11.4 W	195 lm/W	187 lm/W	172 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	2,320 lm	2,220 lm	400 mA	27.0 V	31.0 V	11.4 W	201 lm/W	195 lm/W	179 lm/W	> 80
QLE 540x270mm – Operating mode NM at 500 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	2,790 lm	2,670 lm	500 mA	27.2 V	31.2 V	14.3 W	192 lm/W	187 lm/W	172 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	2,900 lm	2,780 lm	500 mA	27.2 V	31.2 V	14.3 W	200 lm/W	194 lm/W	178 lm/W	> 80
QLE 540x270mm – Operating mode HO at 600 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	3,360 lm	3,210 lm	600 mA	27.4 V	31.4 V	17.3 W	192 lm/W	186 lm/W	171 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	3,490 lm	3,340 lm	600 mA	27.4 V	31.4 V	17.3 W	199 lm/W	193 lm/W	178 lm/W	> 80
QLE 540x270mm – Operating mode HO at 700 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	3,920 lm	3,750 lm	700 mA	27.6 V	31.6 V	20.3 W	190 lm/W	185 lm/W	170 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	4,070 lm	3,900 lm	700 mA	27.6 V	31.6 V	20.3 W	198 lm/W	192 lm/W	177 lm/W	> 80
QLE 540x270mm – Operating mode HO at 800 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	4,490 lm	4,290 lm	800 mA	27.7 V	31.8 V	23.4 W	190 lm/W	184 lm/W	170 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	4,660 lm	4,460 lm	800 mA	27.7 V	31.8 V	23.4 W	197 lm/W	191 lm/W	176 lm/W	> 80
QLE 540x270mm – Operating mode HO at 900 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	5,050 lm	4,830 lm	900 mA	27.9 V	32.0 V	26.4 W	188 lm/W	183 lm/W	168 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	5,240 lm	5,020 lm	900 mA	27.9 V	32.0 V	26.4 W	195 lm/W	190 lm/W	175 lm/W	> 80
QLE 540x270mm – Operating mode HO at 1,000 mA											
QLE 540x270mm 2500lm 830 ADV5	830/359	5,620 lm	5,370 lm	1,000 mA	28.1 V	32.2 V	29.5 W	188 lm/W	182 lm/W	167 lm/W	> 80
QLE 540x270mm 2500lm 840 ADV5	840/359	5,830 lm	5,580 lm	1,000 mA	28.1 V	32.2 V	29.5 W	195 lm/W	189 lm/W	174 lm/W	> 80

^① Integral measurement over the complete module.

^② If mounted with M4 screws.

^③ Tolerance range for optical data: ±7.5 % and electrical data: ±10 %.

^④ NM ... nominal mode, HO ... high output.


^⑤ Measured at Imax.

Product description

- Clip for fixation of LED modules with 4.3 mm holes
- Fast snap on mounting (sheet thickness 0.5 – 1.0 mm for PUSH-FIX and 1 – 2 mm for PUSH-FIX Long)
- For drilling hole 4 mm
- Clip made of Polycarbonat




ACL CLIP 4.3mm PUSH-FIX

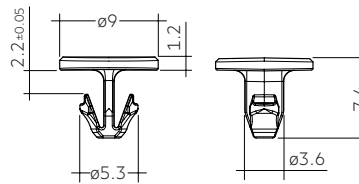

ACL CLIP 4.3mm PUSH-FIX



ACL CLIP 4.3mm PUSH-FIX Long

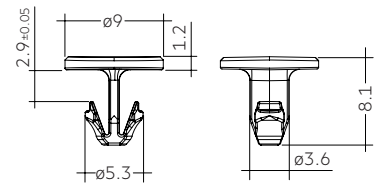

ACL CLIP 4.3mm PUSH-FIX Long

Ordering data

Type	Article number	Colour	Packaging bag ^①	Weight per pc.
ACL CLIP 4.3mm PUSH-FIX	28001036	White	500 pc(s).	0.001 kg
ACL CLIP 4.3mm PUSH-FIX Long	28002314	Transparent	500 pc(s).	0.001 kg

^① Minimum sales quantity 500 pcs.

1. Standards

IEC 62031
IEC 62471
IEC 62778
UL 8750 (for CLASS2 circuits and dry locations)

1.1 Photometric code

Key for photometric code, e. g. 830 / 359

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the life-time (max.6000h)	Luminous flux after 25% of the life-time (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 %
				9 ≥ 90 %

1.2 Energy classification

Type	Energy classification
QLE ADV5	A++

2. Thermal details

2.1 tc point, ambient temperature and life-time

The temperature at tp reference point is crucial for the light output and life-time of a LED product.

For QLE a tp temperature of 45 °C has to be complied in order to achieve an optimum between thermal requirements, light output and life-time.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-40 ... +85 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the QLE will be greatly reduced or the QLE may be destroyed.

3. Installation / wiring

3.1 Electrical supply/choice of LED Driver

QLE modules from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED Driver which complies with the relevant standards. The use of LED Driver from Tridonic in combination with QLE modules guarantees the necessary protection for safe and reliable operation.

If a LED Driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



QLE modules must be supplied by a constant current LED Driver. Operation with a constant voltage LED Driver will lead to an irreversible damage of the module.

Wrong polarity can damage the QLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness. If a wire breaks or a complete module fails then the current passing through the other module increases. This may reduce its life considerably.

QLE modules can be operated either from SELV LED Drivers or from LED Drivers with LV output voltage.




QLE modules are basic insulated up to 405 V (if mounted with M4 screws with head diameter of 7 mm) against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the led control gear (also against earth) is above 405 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.


At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring

QLE 250x250mm / 270x270mm:

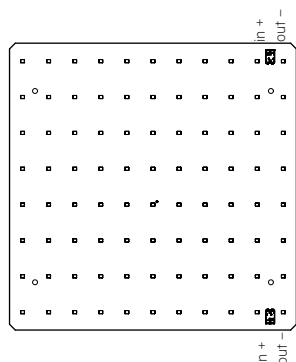


QLE 540x270mm:

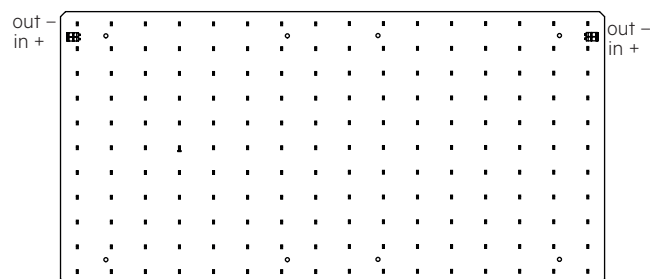


Wiring examples


QLE 250x250mm / 270x270mm serial wiring:

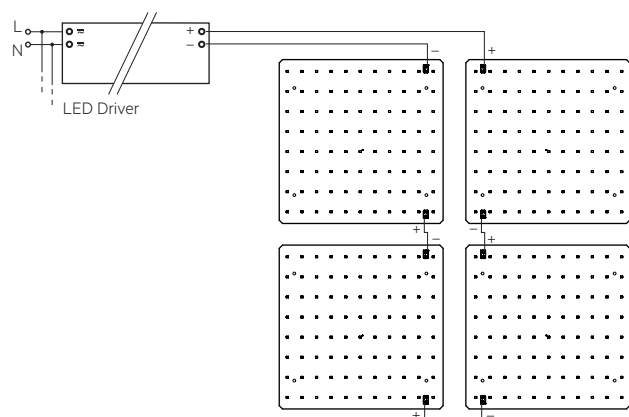


QLE 250x250mm / 270x270mm parallell wiring:

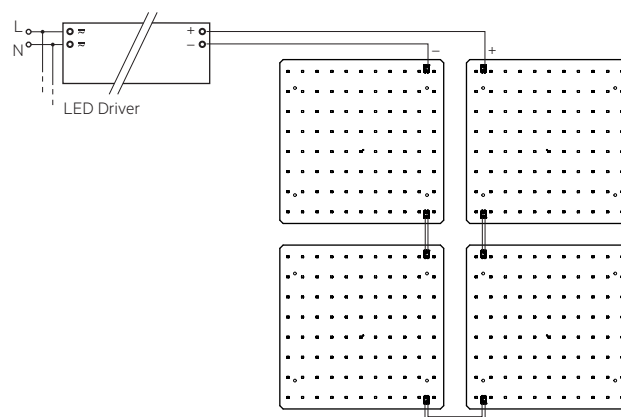


QLE 540x270mm serial wiring:

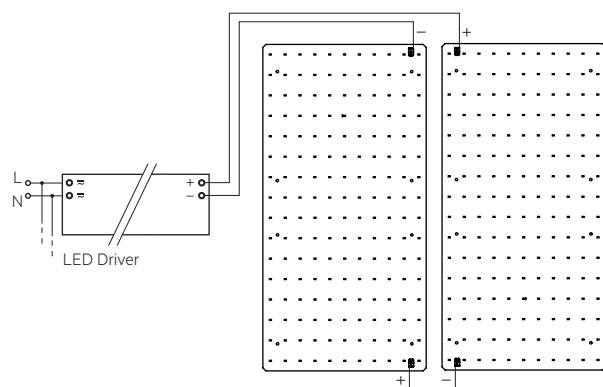

QLE 540x270mm parallell wiring:

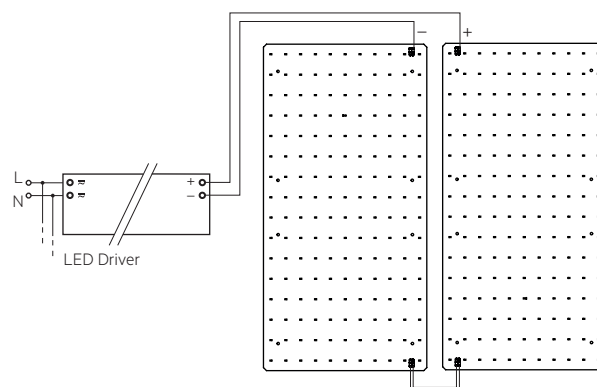

QLE 540x270mm and 270x270mm parallell wiring:

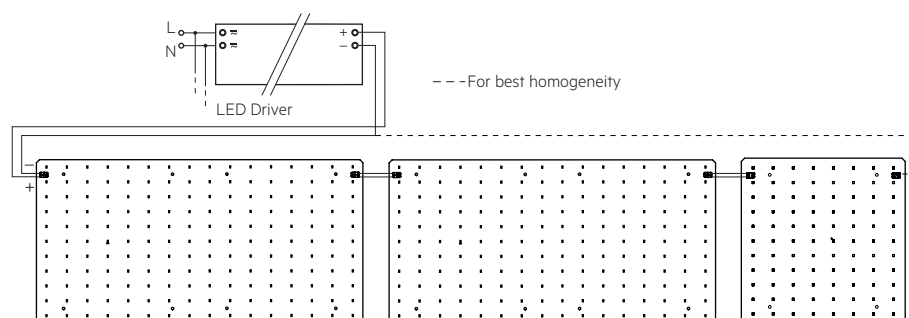


Type	Max. number with parallel wiring*
QLE 250x250 / 270x270mm 1250lm ADV5	6
QLE 540x270mm 2400lm ADV5	3

* with direkt chaining (without additional terminals).

3.3 Wiring type and cross section

The wiring can be in stranded wires or solid with a cross section of 0.2 to 0.75 mm².
For the push-wire connection you have to strip the insulation (8–9 mm).



To remove the wires use a suitable tool (e.g. Microcon release pin) or through twist and pull.

3.4 Mounting instruction



None of the components of the QLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.

The LED modules are mounted with M4 screws or ACL CLIP 4.3mm per module.



Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.

Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Life-time

4.1 Life-time, lumen maintenance and failure rate

The light output of an LED Module decreases over the life-time, this is characterized with the L value.
L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the life-time of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value.

In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for QLE

QLE 250x250mm / 270x270mm:

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
200 mA	40 °C	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	69,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
250 mA	40 °C	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	69,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
300 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
350 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
400 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
450 mA	40 °C	70,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	67,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
500 mA	40 °C	70,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	62,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	67,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h

QLE 540x270mm:

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
400 mA	40 °C	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	69,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
500 mA	40 °C	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	69,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
600 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	64,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	57,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
700 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
800 mA	40 °C	71,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	68,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
900 mA	40 °C	70,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	63,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	67,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
1,000 mA	40 °C	70,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	50 °C	62,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h
	60 °C	56,000 h	67,000 h	> 72,000 h	> 72,000 h	> 72,000 h	> 72,000 h

Lumen maintenance values are based on LM80 data. Table may be updated when more recent results are available.

4.3 Switching capability

100,000 cycles

Tridonic test according to IEC 62717 Cl 10.3.3
30 s on / 30 s off at Imax

5. Electrical values

5.1 Declaration of electrical parameters

Irated ... Nominal operating current the module is designed for.


I_{max} ... Max. permissible continuous operating current incl. the tolerances of the LED Driver.

Max. permissible LF current ripple ... Max. output current of the LED driver incl. Tolerances and LF current ripple must not exceed this value.


Max. permissible peak current ... The max. output peak current of the LED driver must not exceed this value.

5.2 Typ. forward voltage vs. forward current at $t_p = 25^\circ\text{C}$


QLE 250x250mm / 270x270mm:

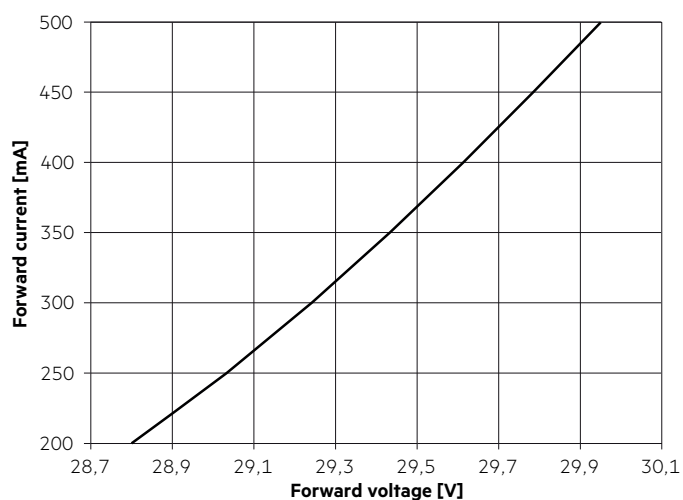

QLE 540x270mm:

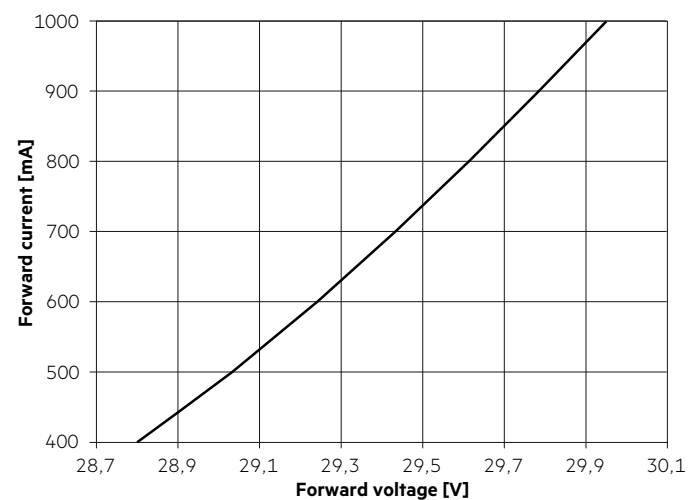

5.2 Forward voltage vs. t_p temperature

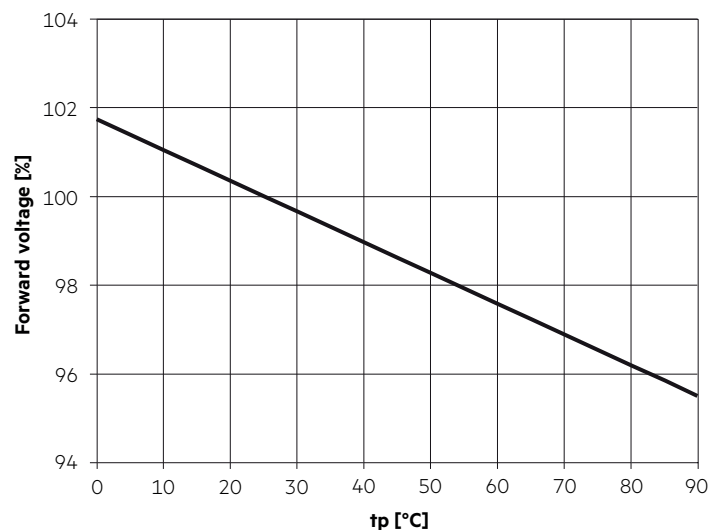

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931


The specified colour coordinates are measured integral by a current impulse of 200 / 400 mA and a duration of 100 ms.

The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.


The measurement tolerance of the colour coordinates are ± 0.01 .

3,000 K, CRI 80

	x0	y0
Centre	0.4357	0.3987

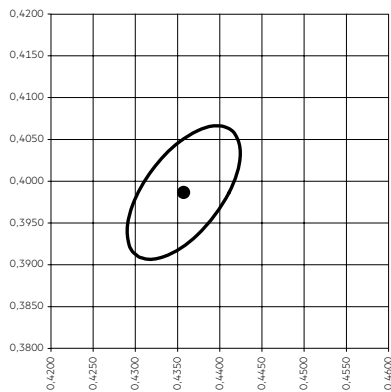


— MacAdam Ellipse: 3SDCM

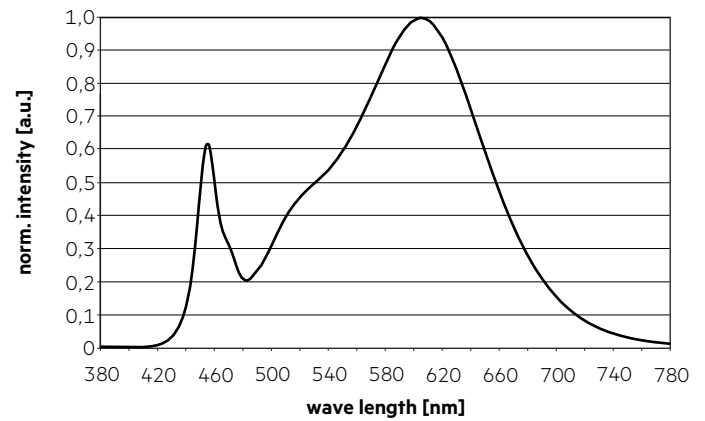


4,000 K, CRI 80

	x0	y0
Centre	0.3844	0.3787

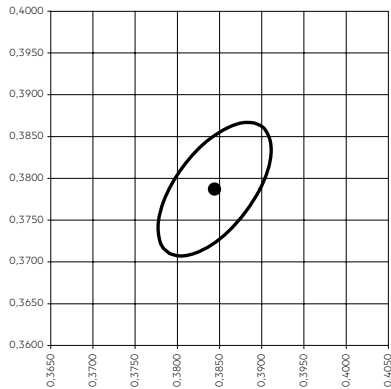


— MacAdam Ellipse: 3SDCM

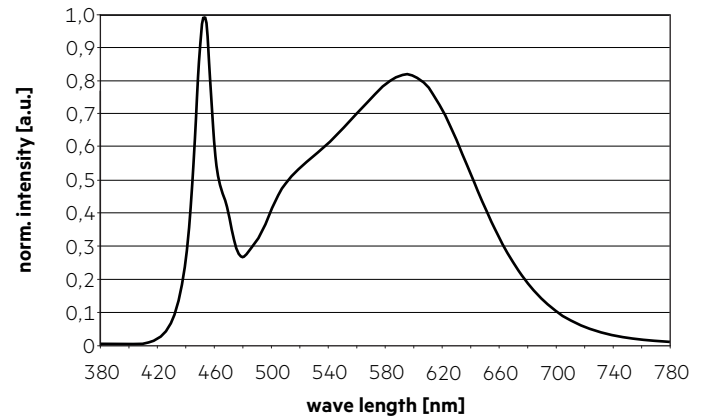


5,000 K

	x0	y0
Centre	0.3465	0.3547

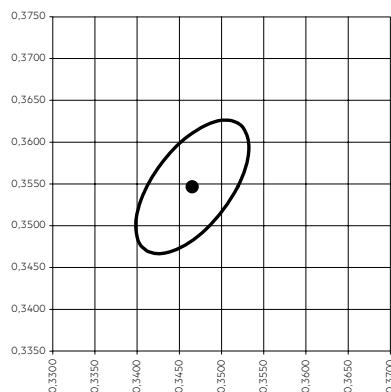


— MacAdam Ellipse: 3SDCM

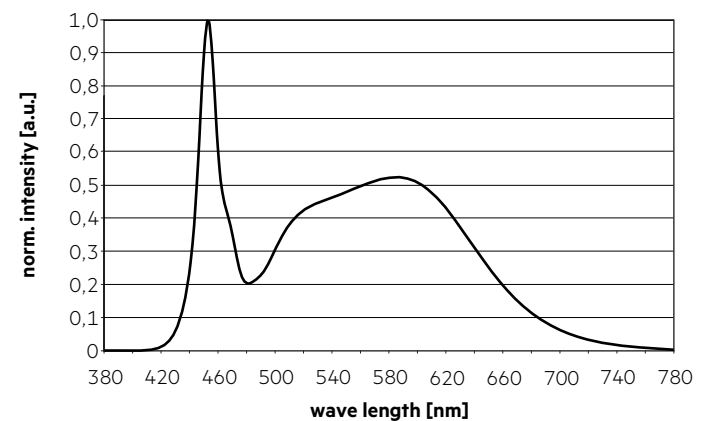


6.2 Light distribution

The optical design of the QLE product line ensures optimum homogeneity for the light distribution.

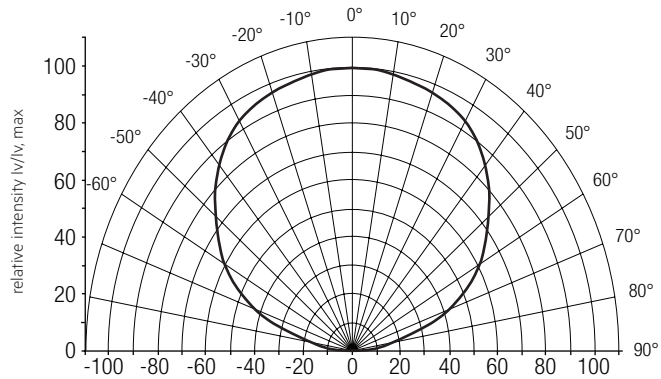


The colour temperature is measured integral over the complete module. The single LED light points can have deviations in the colour coordinates within MacAdam tbd. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 6 cm) should be used. Designed for typical area luminaires like 600 x 600 mm troffer fittings. Special applications like illuminated ceilings must be evaluated individually.

6.3 Relative luminous flux vs. tp temperature

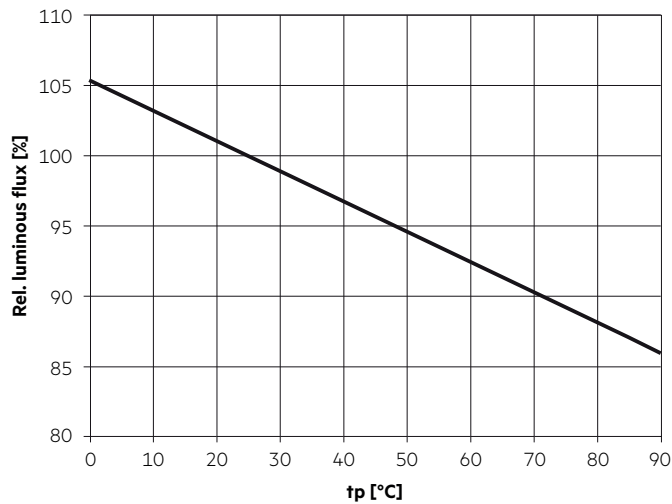


6.4 Relative luminous flux vs. operating current

QLE 250x250mm / 270x270mm:

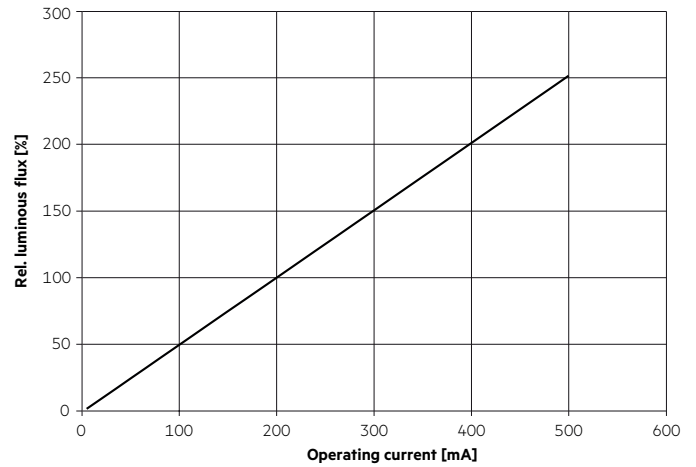

QLE 540x270mm:

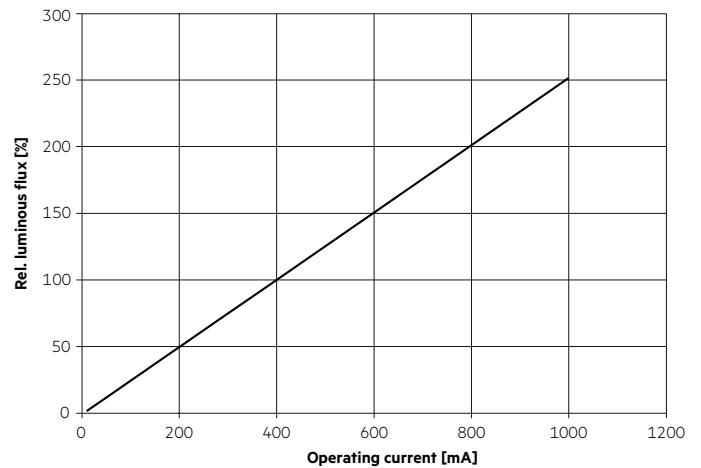

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Life-time declarations are informative and represent no warranty claim.