

ONTEC **S20**
ONTEC **S (25)**
ONTEC **S30**

universal luminaires, IP65/IP67

evacuation route direction (evacuation sign)

anti-panic lighting, escape route lighting



20 m



25 m



30 m



PARAMETERS

- » Luminaire with high IP and IK (**IP65/IP67** and **IK08/IK10**) dedicated to industrial and office area
- » **COLD versions available** – without additional heating elements – low temperature tolerance, perfectly fit to warehouses and garages
- » **Universal products:**
 - » M – open space area (anti panic light),
 - » C version – evacuation route lighting (corridor lens) optimal up to 7 m high,
 - » F version – evacuation route light (corridor lens) above 7 m high,
 - » W version – fire protection points and exit doors illumination,
 - » evacuation route directions (both wall and ceiling installation).
- » Wide range of accessories which provide various options for mounting of luminaire
- » **Easy and quick installation using the IN/OUT connection - ONTEC S20 and S30**
- » Dimensions L x W x H [± 2 mm]:
 - » ONTEC S20 - 227 x 40 x 120
 - » ONTEC S (25) - 269 x 40 x 144
 - » ONTEC S30 - 327 x 40 x 170


The DIP-switch enables configuration of the luminaire in the M1X version.

The luminaire has two variables:
duration time - 1 h or 3 h
operating mode - NM or M





VERSIONS

- » Anti-panic lighting, escape route lighting, lighting of the final exit / fire-protection devices

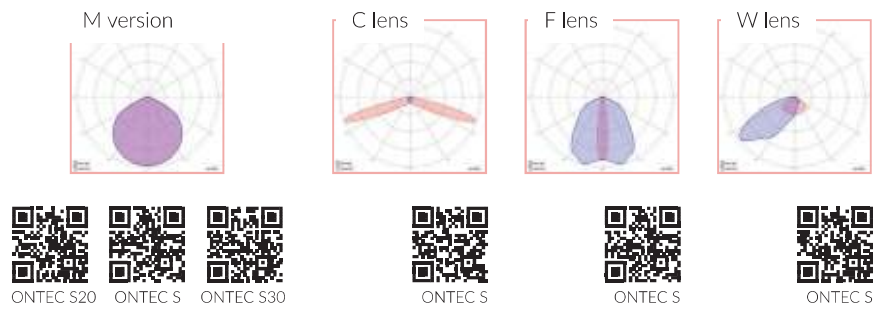

- » Evacuation route direction (evacuation sign)
 - » on the ceiling - using a flag with sticky pictograms
 - » on the wall - with the use of pictograms in the set

ASSEMBLY

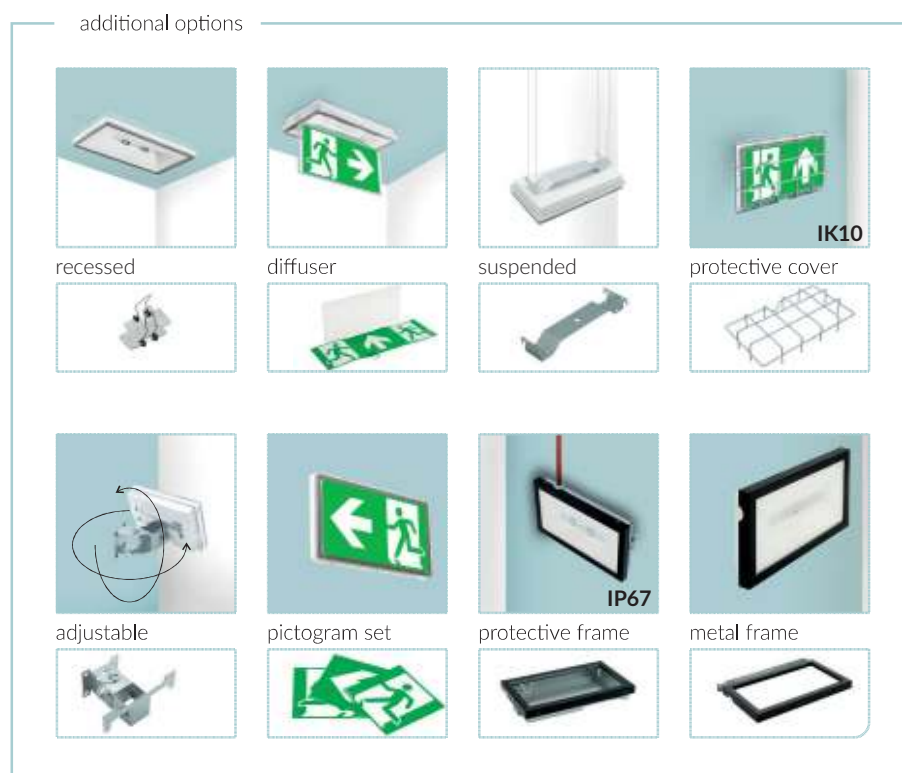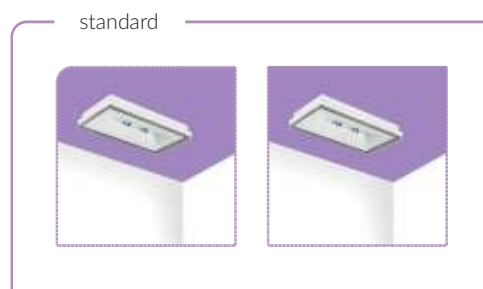

Code	Operating Mode	Active Power W	Lumen Output lm	Battery
ONTEC S M1 180 M ST	M/NM	3,3	150	LiFePO4/C 3.2V 1.5Ah
ONTEC S M1 301 M ST	M/NM			
ONTEC S M1 CB	M/NM	4,5	360	
ONTEC S M1 CBA	M/NM	5,5	360	
ONTEC S M2 302 M ST	M/NM	6,5	241	LiFePO4/C 6.4V 1.5Ah
ONTEC S M5 305 M ST	M/NM	6,8	576	LiFePO4/C 6.4V 3.0Ah
ONTEC S M5 05 CB	M/NM	6,5	576	
ONTEC S M5 05 CBA	M/NM	7	576	
ONTEC S C1 302 M ST	M/NM	6,5	225	LiFePO4/C 6.4V 1.5Ah
ONTEC S C2 305 M ST	M/NM	6,8	453	LiFePO4/C 6.4V 3.0Ah
ONTEC S C1 CB	M/NM	4,5	282	
ONTEC S C1 CBA	M/NM	5,5	282	
ONTEC S C2 05 CB	M/NM	6,5	453	
ONTEC S C2 05 CBA	M/NM	7	453	
ONTEC S F1 302 M ST	M/NM	6,5	226	LiFePO4/C 6.4V 1.5Ah
ONTEC S F2 305 M ST	M/NM	6,8	439	LiFePO4/C 6.4V 3.0Ah
ONTEC S F1 CB	M/NM	4,5	226	
ONTEC S F1 CBA	M/NM	5,5	226	
ONTEC S F2 05 CB	M/NM	6,5	439	
ONTEC S F2 05 CBA	M/NM	7	439	
ONTEC S W1 302 M ST	M/NM	6,5	204	LiFePO4/C 6.4V 1.5Ah
ONTEC S W2 305 M ST	M/NM	6,8	388	LiFePO4/C 6.4V 3.0Ah
ONTEC S W1 CB	M/NM	4,5	204	
ONTEC S W1 CBA	M/NM	5,5	204	
ONTEC S W2 05 CB	M/NM	6,5	388	
ONTEC S W2 05 CBA	M/NM	7	388	